


Our Pride ...

KCP19Z70

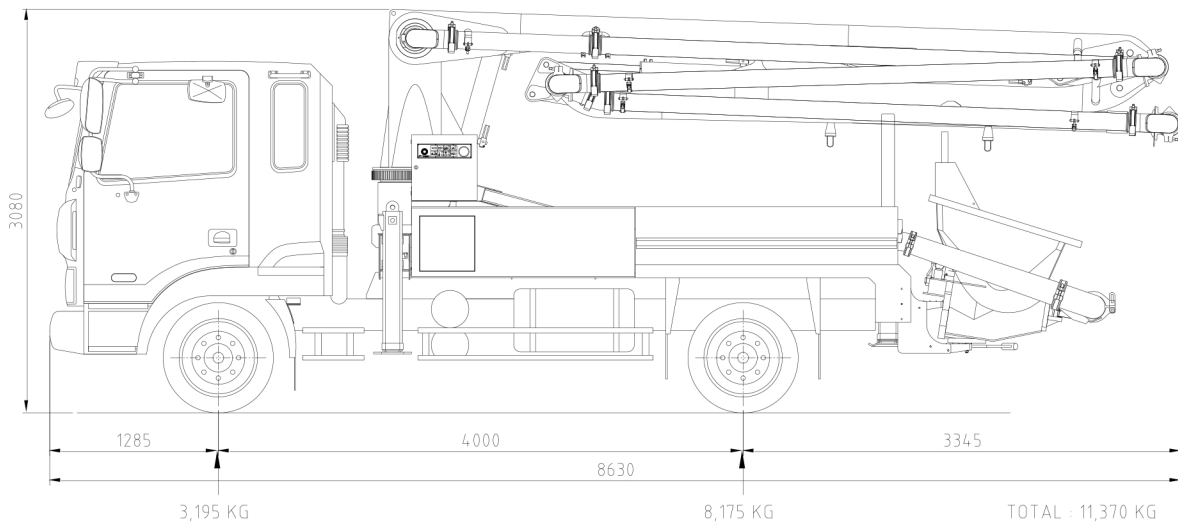

■ Boom specifications

Vertical reach	18.1M
Horizontal reach	14.8M
Reach from front of truck	12.1M
Unfolding height	5.15 M
Section articulation	92°/190°/265°
Rotation	370°
Delivery line	104 mm
Proportional boom	Yes
End hose length	3M
Outrigger spread-front	2.93 M
Outrigger spread-rear	2.6 M
Max.outrigger weight	9,000kg

- ◎ Truck specifications : HYUNDAI-7ton(260ps,euro5)
- ◎ Maximum theoretical values listed.
- ◎ Photos and drawings are for illustrative purpose only
- ◎ Right to make technical amendments reserved

■ Working diagram

■ Pump specifications

Maximum output	70 m³/h
Concrete cylinder	Ø230×1100
Stroke per minute	28
Concrete pressure	53 bar
Hopper capacity	0.6 m³
S-tube	Ø200×Ø150
Hydraulic pump	KCP - K3V180S
Cycling system	Hydraulic with manual overrides
Max. aggregate size	40 mm

