

CANTER SPECIFICATIONS

MODEL

A	4X2 515 WIDE CAB SWB 5 SP. MANUAL (FEB21CR4SFBG)
B	4X2 515 WIDE CAB MWB 5 SP. MANUAL (FEB21ER4SFBG)
C	4X2 515 WIDE CAB SWB 6 SP. DUONIC AMT (FEB21CR3SFBL)
D	4X2 515 WIDE CAB MWB 6 SP. DUONIC AMT (FEB21ER3SFBL)

WHEEL BASE

2800mm
3400mm
2800mm
3400mm

GVM (optional)


4,495kg
4,495kg
4,495kg
4,495kg

GCM (optional)

7,995kg
7,995kg
7,995kg
7,995kg

Engine

Engine Version	FUSO 4P10-T4 Diesel
Configuration	4 Cyl. In-line DOHC, 4-Valve
Injection System	Bosch Common Rail Direct Injection Bosch Piezo Technology Injectors
Type	Variable Geometry Turbo Charged Air to Air Intercooled
Displacement	3 litre (2998cc)
Bore	95.8mm
Stroke	104mm
Power (DIN)	110kW @ 2840~3500 rpm
Torque (DIN)	370Nm @ 1350~2840 rpm
Maximum Engine Speed	4100 rpm
Compression Ratio	17.5:1
Cooling System / Oil Cooler	Water cooled, 13.7L capacity/ Plate type engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Emission Control	Diesel Particulate Filter (DPF) Exhaust Dash Display DPF Status 0~9 (Empty~Full) Parked Regeneration possible from 7~9
Emission Level	ADR 80/03 - Euro 5

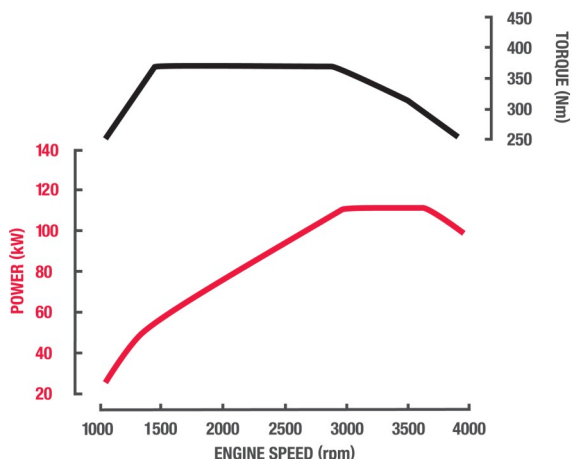

Fuel

Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity *	100 Litres
Filtration	Filter with Water Separator and Indicator Sensor
Notes	*Max Fill to approx 95% of capacity

Cooling

Fan Drive	Thermo modulated continuous control (Viscous)
Radiator	Corrugated Fin with Expansion Tank

Electrical

Voltage	12V Negative Earth		
Battery Capacity	A B C	D	
	2x12V, 70Ah/5hr		1x12V, 70Ah/5hr
Battery Specification	A C	B D	
	115D31L x2		115D31L x1
Headlamp Type	LED		
Headlamp Capacity	TBA		
Body Builder Harness	A	B C D	
	Yes	Yes*	

Clutch

Clutch Model	A B FUSO C4W30	C D Fully Automated Dual Clutch (no clutch pedal)
Type	A B Single Dry Plate, Direct Hydraulic Type	C D Dual Clutch (Wet Multi-plate)

Transmission

Version	A B FUSO M038S5	C D FUSO DUONIC M038S6
Type/Speeds	A B 5 Speed with In-Dash Gearshift Lever	C D 6 Speed Dual Clutch with Auto and Manual Modes
Features	A B Synchromesh 1st-5th	C D Virtually Instant Gear Changes In-Dash Gear Lever with Park Brake Position ECO Mode to Minimise Fuel Usage
Ratios	A B 1st: 5.494 2nd: 3.038 3rd: 1.592 4th: 1.000 5th: 0.723 Rev. 5.494	C D 1st: 5.397 2nd: 3.788 3rd: 2.310 4th: 1.474 5th: 1.000 6th: 0.701 Rev. 5.397
PTO Opening	LH Side	

Front Axle

Axle Version	FUSO F200T	
Type	Independent Front Suspension	
Capacity *	A B C	D
	2300kg	2180kg
Notes	*See MAX LOADING for vehicle capacity.	

Front Suspension

Type	Double Wishbone Independent Front Suspension with Coil Springs and Shock Absorbers
------	--

Rear Axle

Type	Full Floating Banjo Type
Axle Version	FUSO R030T
Capacity*	3800kg
Ratio	4.444:1
Notes	*See MAX LOADING for vehicle capacity.

Rear Suspension

Type	Steel Suspension
Details	Parabolic Leaf with Shock Absorbers
Size Main Leaves	1100x70mm

Max Loading

Front	2180kg
Rear	3800kg
Total	4495kg

Options

CANTER SPECIFICATIONS

MODEL	WHEEL BASE	GVM (optional)	GCM (optional)
A 4X2 515 WIDE CAB SWB 5 SP. MANUAL (FEB21CR4SFBG)	2800mm	4,495kg	7,995kg
B 4X2 515 WIDE CAB MWB 5 SP. MANUAL (FEB21ER4SFBG)	3400mm	4,495kg	7,995kg
C 4X2 515 WIDE CAB SWB 6 SP. DUONIC AMT (FEB21CR3SFBL)	2800mm	4,495kg	7,995kg
D 4X2 515 WIDE CAB MWB 6 SP. DUONIC AMT (FEB21ER3SFBL)	3400mm	4,495kg	7,995kg

Steering	
Type	Rack & Pinion
Steering Column	Tilt/Telescopic Adjustable
Power Assist	Standard

Brakes	
Type	Hydraulic Dual Circuit with Front and Rear Discs
Size Front	219x28mm
Size Rear	219x28mm
Features	ABS plus EBD (Electronic Brake Distribution) Active Emergency Braking System (AEBS) Electronic Stability Program (ESP) Exhaust Brake Brake Priority System Electronic Brake Wear Sensors (From Aug 20 build)
Park Brake	Transmission Mounted

Wheels & Tyres	
Wheel Type	7 x Single Piece Disc Rims (Including Spare)
Wheel Size	16.0x5.5K-115
Wheel Stud Pattern	5 Stud 208 PCD
Tyre Size All	185/85R16 111/109
Spare Tyre Carrier	Provided
Spare Tyre	Provided

Chassis	
Type	Reinforced Tapered Channel
Size	188x60x4mm
Width	748mm
Tensile Strength	540 MPa

Instruments	
Gauges	Speedometer with Odometer Tachometer Fuel Level Water Temperature
Colour Information Display	Fuel Consumption DPF Bar Chart from 1-9 Water Temperature Lane Departure Warning Maintenance Reminder System Tripmeters

Multi-Media Package	
Satellite Navigation	Maps with heavy vehicle weight, length, height & hazardous material selectable restrictions with 3 years of Map updates
Colour Display	8 inch LCD with touch screen control
Phone Connectivity	Bluetooth® hands free + phone mirroring.
Audio Visual Entertainment	Bluetooth® music streaming compatible Digital radio DAB+ (also AM/FM for areas not covered by DAB+) & USB
Reversing Camera Compatible	Display can accept up to 5 cameras#
Optional Accessories (available at additional cost)	Rear Mounted Parking Sensor Kit High or Low Tyre Pressure Monitoring System
Notes	# Cameras available through spare parts

Standard Features	
Airbag(s)	Dual Air Bags and Seat Belt Pre-Tensioners (Driver & Far Side Passenger)
Active Safety Features	ABS plus Electronic Brake force Distribution (EBD) Advanced Emergency Braking (AEBS) Anti-Slip Regulator (ASR) Electronic Stability Program (ESP) Lane Departure Warning System (LDWS)
Cruise Control	A B No C D Yes
Hill Start System	Yes
Cab Cooling & Heating	Air Conditioner / Heater / Demister
Accessory Power Driving	12V Accessory Power Outlet / Cigar Lighter A B C D Fuso Multimedia Unit Keyless Central Locking Cruise Control Electric Windows Cup Holders (2)
Storage	Dual Overhead Storage Pockets In-Dash Centre Document Storage Door Storage Pockets Dash Storage Tray (1 DIN) Coat Hooks
Cab: External	Front End-Outline Marker Lamps Door Side Impact Beams
Chassis	Reverse Warning Buzzer Factory Reverse Camera with Infrared Display and Audible Pickup (Supply only in Cabin with Cab Chassis)

Cab Features	
Cab Structure	ECE-R29 European Cab Strength Approved
Mounting	Hydroelastic 4 Point
Additional Engine Access	A B N/A C D Removable Engine Access Panel
Colour	Natural White
Windscreen Wipers	2 Speed + Intermittent Cycle with Integrated Washer Nozzles
Rear Vision Mirrors	1 x Internal 2 x External Convex (ECE 46) - Heated
Seating Capacity	3
Seat Belts	Lap Sash Belts for Outside Seating Positions Lap Belt for Centre Seat Driver Seat Belt Warning
Seat (driver)	Suspended with Weight Adjustment, LH Arm Rest and Lumbar Support
Seats (passenger)	Flat Folding, 2 Passenger Bench

Service Intervals	
Interval*	30,000km or 12 Months (whichever occurs first)

Warranty	
Basic/Powertrain	5 Years or 200,000kms (whichever occurs first)
Cab Perforation/Anti Corrosion	5 Years
Notes	* based on normal operating conditions and may be reduced when operating under severe conditions.

CANTER SPECIFICATIONS

MODEL	WHEEL BASE	GVM (optional)	GCM (optional)
A 4X2 515 WIDE CAB SWB 5 SP. MANUAL (FEB21CR4SFBG)	2800mm	4,495kg	7,995kg
B 4X2 515 WIDE CAB MWB 5 SP. MANUAL (FEB21ER4SFBG)	3400mm	4,495kg	7,995kg
C 4X2 515 WIDE CAB SWB 6 SP. DUONIC AMT (FEB21CR3SFB)	2800mm	4,495kg	7,995kg
D 4X2 515 WIDE CAB MWB 6 SP. DUONIC AMT (FEB21ER3SFB)	3400mm	4,495kg	7,995kg

Performance

Turning Circle (kerb to kerb - metres)	A C 9.4	B D 11.0
Road Speed (km/h) at Max Engine Speed	A B 137	C D 136
Engine Speed (rpm) at 100km/hr (top gear)	B 2420	C D 2346
Gradeability at Rated GVM (theoretical)*	A B 46.5%	C D 45.5%
Notes	*This is theoretical performance only. Actual performance may vary under different conditions	

Mass estimated*



Front*	A 1470kg	B 1475kg	C 1480kg	D 1490kg
Rear*	A 575kg	B C 585kg	D 600kg	
Total*	A 2045kg	B 2070kg	C 2065kg	D 2090kg
Notes	* Mass (est.) includes oil and water but excludes spare wheel, tools & fuel. Weights provided are subject to 3.5% variation (+/-)			

Dimensions mm

WFF (Width Front Fender) (mm)	1995			
WRA (Width Rear Axle) (mm)	A C 1929		B D 1925	
WFT (Width Front Track) (mm)	1655			
WRT (Width Rear Track) (mm)	1495			
Width Frame (mm)	A C 748		B D 750	
A - Length Overall (mm)	A C 5135		B D 5935	
C - Front Overhang (mm)	1140			
D - Wheelbase (mm)	A C 2800		B D 3400	
G - Front Axle to Rear of Cab (mm)	525			
H - Rear of Cab to Rearmost Item Behind Cab (mm)	A B 81		C D 50	
I - Rearmost Item Behind Cab to Rear Axle (mm)	A 2194	B 2794	C 2225	D 2825
J - Frame, Rear Axle to End (mm)	A C 1195		B D 1395	
P - Height Cab to Ground (mm)	2165			
Q - Height Cab to Frame (mm)	1516			
R - Height Rear Frame to Ground (mm)	A C 728		B D 727	

Body Builder's Notes

Notes	Chassis reinforcement must be utilised for Tipper/ Demountable type body configurations. To conform with ADR 13/00 and 14/02 (lighting/mirror requirements) the following must be adhered to at body installation. - If overall width exceeds 2.1 metres and other than flat type or tipper body is fitted, rear end-outline markers must be installed. - If overall length exceeds 6.0 metres, side reflectors must be installed. - If overall length exceeds 7.5 metres and width exceeds 2.1 metres, side marker lamps must be installed. - If overall width is less than 2.2 metres, the mirrors must be modified to project not more than 230mm. To conform with ADR 42/04 (General Safety), rear wheel guards must be fitted to the vehicle.
-------	--

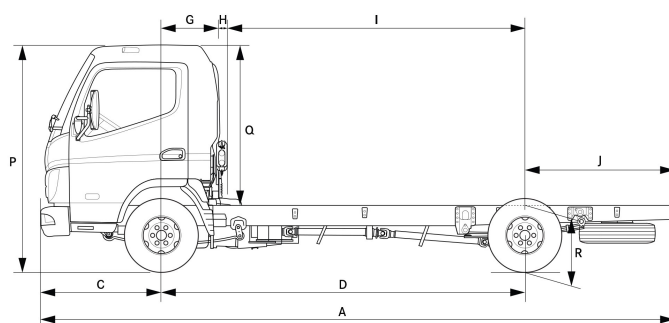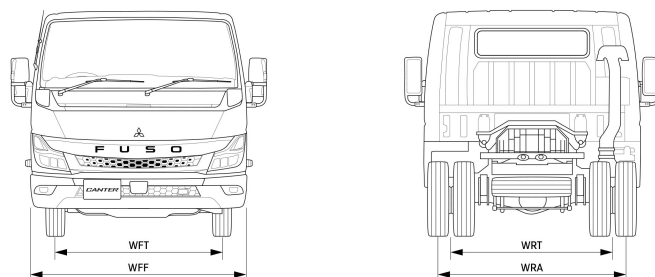

Call 1800 033 557

or visit fuso.com.au

Unless specified in writing herein the accessories, applications, bodies or equipment depicted in this are for illustration purposes only and may not be available from Daimler Truck Australia Pacific Pty Ltd. ABN 86 618 413 282 DTAuP. No representation or warranty whatsoever is given in relation to any accessories, applications, bodies or equipment or suitability of same that are shown herein that may be manufactured, supplied or fitted by a party other than DTAuP. DTAuP reserves the right without notice or obligation to discontinue or make changes to the colour, designs, materials and specifications of the products and options referred to herein at any time. For the most current information and in order to ascertain which accessories, applications, bodies and equipment are available from DTAuP please contact your authorised FUSO Truck and Bus dealer. Fuso is a registered trademark of Daimler Truck Australia Pacific Pty Ltd. Copyright DTAuP. Reproduction in whole or part prohibited without written approval. Valid from 23-Feb-24.